

TECHNICAL INFORMATION

- PRODUCT PROPERTIES**
- ✓ Can be used without primer
- ✓ Very fine-grained
- ✓ Very quick drying
- ✓ Extremely flexible
- ✓ High strength
- ✓ Smooth and easy to apply
- ✓ For universal use
- ✓ Can be feathered down to zero
- ✓ Early readiness for covering

- SUITABLE SUBFLOORS**
- ✓ Stone, ceramics, terrazzo, tiles
- ✓ Metal subfloors, such as checker plate
- ✓ Chipboard panels V100 (E1), OSB boards
- ✓ And many more...

- LAYER THICKNESS**
- ✓ 0–5 mm

- QUANTITY REQUIRED PER M²**
- ✓ 1100 g per mm of layer thickness

- CAN BE WALKED ON AFTER:**
- ✓ Approx. 20–30 min at 20 °C


- READY FOR COVERING AFTER:**
- ✓ Approx. 0.5–1.5 hours, for elastic and textile coverings

- SHELF LIFE**
- ✓ 6 months

- PACKAGE SIZE**
- ✓ Set = 2 x 4.5 kg paper bag including stirrer, cup and trowel in a STAUF measuring bucket
- ✓ 4 x 4.5 kg paper bag

- COLOUR**
- ✓ White

- EMICODE/GISCODE**
- ✓ EC 1 R^{PLUS} / ZP1

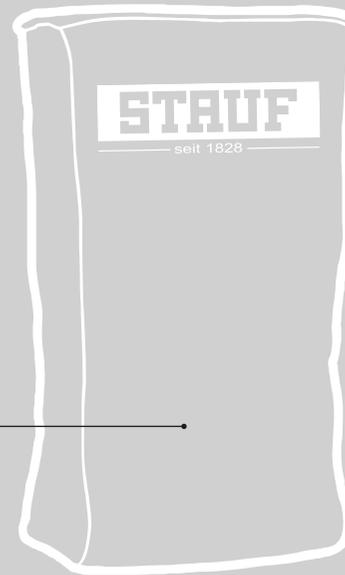

STAUF
seit 1828

CONTACT US TODAY

- ☎ +49 2739 301-0
- 📠 +49 2739 301-200
- ✉ info@stauf.de
- 🌐 www.stauf.de

STAUF KLEBSTOFFWERK GMBH

Oberhausener Str. 1 . 57234 Wilnsdorf . Germany

STAUF
seit 1828

TURBO FIX

The quick fix solution for uneven subfloors



07.2016/V1/500/RD

PROBLEM SOLVER

RELIABLE Sometimes time is of the essence: When small irregularities and corrugations need to be evened out quickly, STAUF Turbo Fix provides a quick and reliable solution. The repair compound is an all-round talent that is useful for filling, smoothing and evening out. Which is why it belongs in every floor layer's "emergency kit" – always to hand and ready for use. Moreover, STAUF Turbo Fix is also assigned to the best EMICODE category: EC 1 R^{PLUS}. This means that we offer you and your customers a healthy and comfortable living environment with indoor air that is clean and safe.




QUICK FIX

RAPID Fast, faster, Turbo Fix. Because we know: your time is precious. This is why STAUF Turbo Fix can be used immediately, without priming the surface first. The set includes a mixing cup, so that you have everything to hand and can mix the required quantity quickly and easily, ready for use. The repair compound is extremely smooth and easy to spread. And it dries in next to no time too – so that you can continue working in no time at all. Elastic and textile coverings can be laid after just 30 minutes.

MULTIFACETED

UNIVERSAL A real all-rounder: STAUF Turbo Fix. Thanks to the wide spectrum of possible applications and excellent properties, almost all types of substrate can be evened out. The repair compound bonds well to a wide range of different materials and its particularly fine consistency allows it to be applied as a wafer-thin layer. Irregularities can be evened out to a tenth of a millimetre. STAUF Turbo Fix is used primarily for evening out irregularities in filled surfaces, repairing stairs and preparing surfaces, by smoothing over old tiles or coverings, for example. It allows you to create smooth and even surfaces within a short space of time.

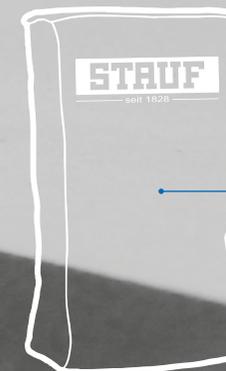

- Levelling uneven subsurfaces
- Repairing stairs
- Preparing surfaces, e.g. by smoothing over old coverings



STAUF TURBO FIX SET

2 x 4.5 kg Turbo Fix,
mixing cup, measuring
bucket, trowel, stirrer